

## Luxor

---

### SPECIFICATIONS

#### CONTENT

European performance cowhide

#### FINISH

Aniline dyes, pigments, protective topcoat

#### TEXTURE

Smooth

#### CHARACTERISTICS

Matte, smooth, sturdy hand

#### AVERAGE HIDE SIZE

50-55 sqft

#### THICKNESS

1.0-1.1mm

#### SUITABILITY

Residential, Hospitality, Contract, Marine

#### CONSIDERATIONS

Vacuum dried for super flat finish, CRIB5 inherent

### ENVIRONMENTAL

REACH Compliant

Meets European PFAS standards

### AVERAGE USABLE AREA

This is a natural product, the average usable area will vary depending on the size of the hide. Please use these dimensions as guidelines.

horizontal: 150cm x 160cm | 59in x 63in

vertical: 100cm x 200cm | 39in x 79in

### PERFORMANCE

#### ABRASION

UNI EN ISO 11640

1000 cycles dry: >4 Grey Scale

200 cycles wet: >4 Grey Scale

50 cycles perspiration: >4 Grey Scale

#### FLAMMABILITY

BS 5852 Part 1/ Cigarette and Match: Pass

UNI EN ISO 1021-1 & 2: Pass

CRIB 5: Pass 

IMO FTP 2010 Part 7 & 8: Pass 

CAL 117(2013 Edition) : Pass

NFPA 260: Pass

#### TEAR STRENGTH


UNI EN ISO 3377-1 : >20 N/mm

#### LIGHT FASTNESS

UNI EN ISO 105-B02 : >5 Blue Scale

#### FLEXING ENDURANCE

UNI EN ISO 5402 : No finish damage cracks after 30,000 cycles

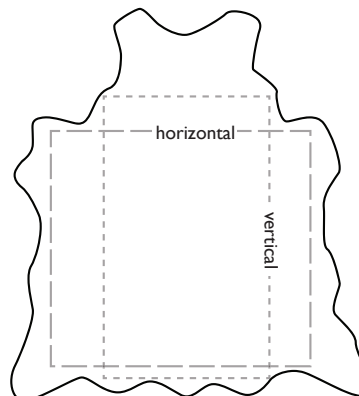

## Lehua

---

### SPECIFICATIONS

#### CONTENT

European performance cowhide

#### FINISH

Semi-matte, pigmented , fixed wax, protective topcoat

#### TEXTURE

Small grain, distressed, aged look

#### CHARACTERISTICS

Soft hand, small grain

#### AVERAGE HIDE SIZE

50-55 sqft

#### THICKNESS

0.9-1.1mm

#### SUITABILITY

Residential, Hospitality, Contract, Marine

#### CONSIDERATIONS

Versatile applications, durable, no scratch

### ENVIRONMENTAL

REACH Compliant

Meets European PFAS standards

### AVERAGE USABLE AREA

This is a natural product, the average usable area will vary depending on the size of the hide. Please use these dimensions as guidelines.

horizontal: 150cmx 160cm | 59in x 63in

vertical: 100cm x 200cm | 39in x 79in

### PERFORMANCE

#### ABRASION

UNI EN ISO 11640

500 cycles dry: >4 Grey Scale

250 cycles wet: >4 Grey Scale

80 cycles perspiration: >4 Grey Scale

#### FLAMMABILITY

BS 5852 Part 1/ Cigarette and Match: Pass

UNI EN ISO 1021-1 & 2: Pass

CRIB 5: Available on request

IMO FTP 2010 Part 8: Pass 

CAL 117(2013 Edition) : Pass

NFPA 260: Pass

#### TEAR STRENGTH

UNI EN ISO 3377-1 : >20 N/mm

#### LIGHT FASTNESS

UNI EN ISO 105-B02 : >5 Blue Scale

#### FLEXING ENDURANCE

UNI EN ISO 5402 : No finish damage cracks after 50,000 cycles

#### FINISH ADHESION

UNI EN ISO 11644 : > 2 N/cm

