

TECHNICAL SPECIFICATIONS

ARTICLE BIARRITZ

Article's description:

• Thickness: 1.1 / 1.3 mm.

• Average hide size: 50 – 55 sqft.

• Aniline dyed leather, embossed * waves, pigmented.

• Applications: Residential, Contract, Marine.

FASTNESS TESTS

• Light fastness : 4 Blue scale

Rubbing fastness 600 cycles dry: 5 Grey Scale
Rubbing fastness 200 cycles wet: 5 Grey Scale

• Flexing endurance: no finish damage cracks after 70000 cycles

Breaking force: 150 lbsWater repellent: yes

• Flammability: Cigarette and Match: Pass; Crib 5 / IMO: On Request.

In accordance with the European regulation: No harmful products Mentioned in European legislation are used to produce this article.



Average Panel Sizes In Hides

Biarritz

55 sq.ft hide


Product Description:

Pigmented leather with waves design.

Plate/Junction Line

Applications:

Residential, Contract & Marine

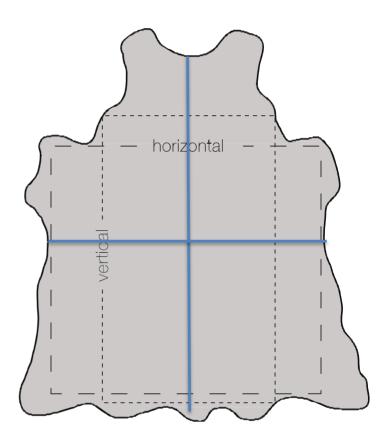

This is an embossed leather and so will have plate/junction lines from the embossing process – there will be a line down the spine and 1 horizontally, as shown in the example image attached of Ray Gold. Each hide is effectively split into 4 panels – dimensions of each are approx. 0.8m²x0.8m²

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.



Average Panel Sizes In Hides

Biarritz - Quicksilver

25 sq.ft hide (half hide)


Vertical panel 160cm x 75cm Horizontal panel 200cm x 50cm

Product Description:

Pigmented leather with waves print

Applications:

Residential, Contract & Marine

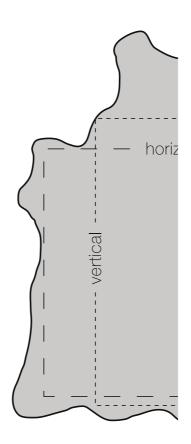

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.