



TECHNICAL SPECIFICATIONS

ARTICLE CANGO

Article's description:

- **Thickness: 1.0-1.2 mm**
- **Average hide size: 50 sqft**
- **European Bovine leather, Chrome tanned, aniline dyed and finished.**
- **Embossed Ostrich (double tone effect on the tips)**
- **Applications: Contract, Residential, Marine.**

FASTNESS TESTS

- **Light fastness: 5 Blue Scale**
- **Rubbing fastness 500 cycles dry: min 3 Grey Scale**
- **Rubbing fastness 250 cycles wet: min 3 Grey Scale**
- **Rubbing fastness 80 cycles perspiration: min 3 Grey Scale**
- **Finishing Adhesion: > 2 N/10 mm**
- **pH > 3.2 (if the pH value is below 4, difference figure pH < 0.7)**
- **Flexing endurance: no finish damage cracks after 50000 cycles**
- **Tear strength: min 20 N/mm**
- **Flammability: Cigarette and Match: Pass; Crib 5: On Request.**

Average Panel Sizes In Hides

Cango


50 sq.ft hide

Product Description:

Embossed hand finished leather with a two tone effect - ostrich design
Plate/Junction Line

Applications:

Residential, Contract & Marine

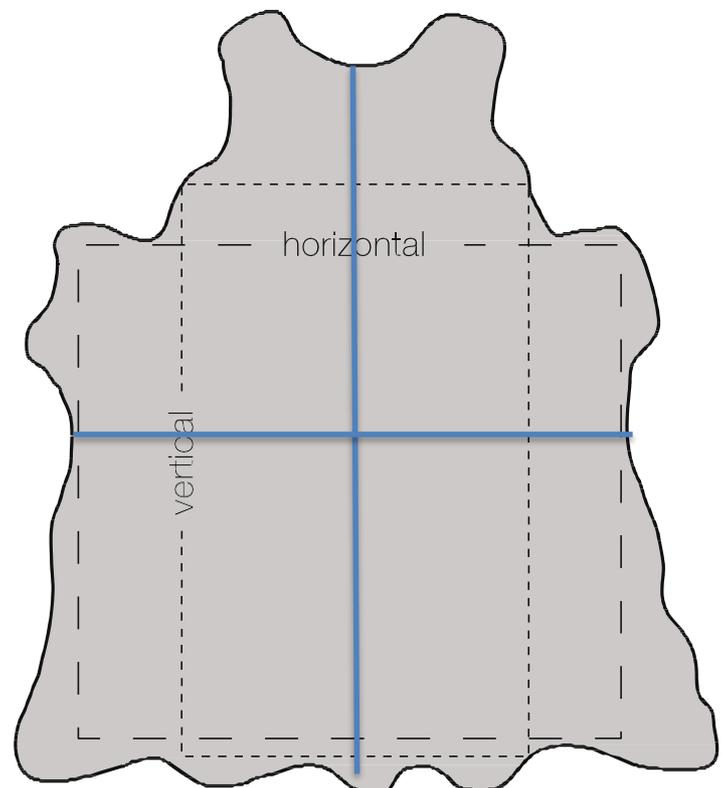

This is an embossed leather and so will have plate/junction lines from the embossing process – there will be a line down the spine and 1 horizontally. Each hide is effectively split into 4 panels – dimensions of each are approx.

0.7mx0.7m/089mx0.8m

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.