



TECHNICAL SPECIFICATIONS

HAMILTON

Article's description:

- Thickness: 1.1 / 1.3 mm
- Average hide size: 50-55 sqft
- Aniline dyed and Hydro repellent treated nubuck leather. Finished with a black colour and aged in the milling drum. The article is designed in order to age with use and finishing gradually wear off.
- Applications: Residential, Contract and Marine.

FASTNESS TESTS

- Light fastness: > 2 Blue scale
- Rubbing fastness 50 cycles dry: > 3 Grey scale
- Rubbing fastness 20 cycles wet: > 2 Grey scale
- Rubbing fastness 20 cycles perspiration: > 2 Grey scale
- Tear strength: > 20 N
- Flexing endurance: no finish damage cracks after 20000 cycles
- Flammability: Cigarette and Match: Pass; Crib 5 and IMO: On Request.

In accordance with the European regulation: No harmful products Mentioned in European legislation are used to produce this article.

Average Panel Sizes In Hides

Hamilton


50 sq.ft hide

Vertical panel 100cm x 200cm

Horizontal panel 150cm x 160cm

Applications:

Residential, Contract, Marine & Fashion

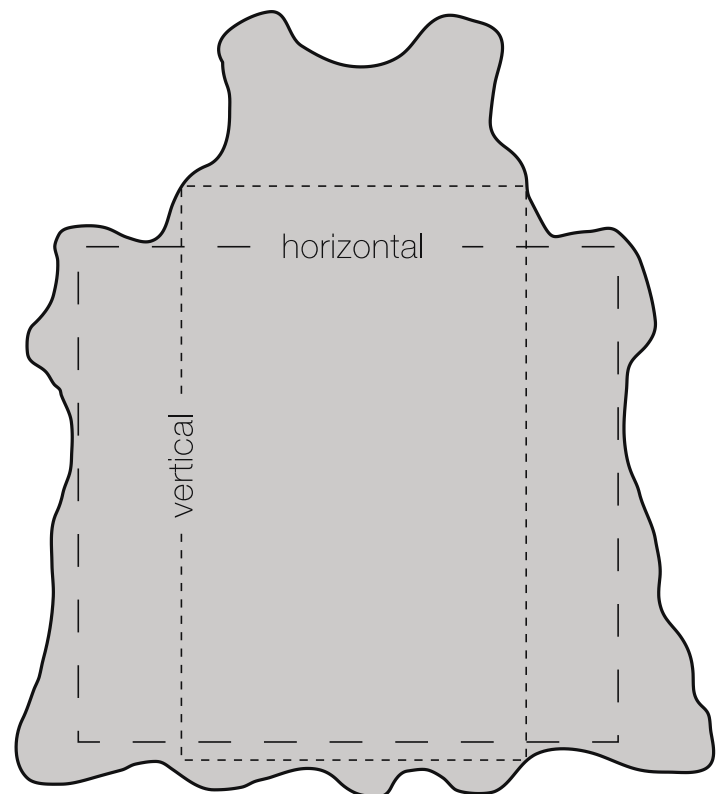

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.