



TECHNICAL SPECIFICATIONS

ARTICLE LUXOR

Article's description:

- Thickness: 1.0-1.1 mm
- Chrome tanned, dyed through aniline leather vacuum dyed and finished.
- Flame retardant re-tanning
- Average hide size: 50-55 sqft
- Applications: Contract, Residential and Marine.

FASTNESS TESTS

- Rubbing fastness 1000 cycles dry: min 4 Grey Scale
- Rubbing fastness 200 cycles wet: min 4 Grey Scale
- Light fastness: > 5 Blue scale
- Flexing endurance: no finish damage cracks after 30000 cycles
- Tear strength: min 20 N/mm
- Flammability: Cigarette and Match: Pass; Crib 5: On Request.

Average Panel Sizes In Hides

Luxor

55 sq.ft hide

Vertical panel 100cm x 210cm


Horizontal panel 160cm x 170cm

Product Description:

Aniline dyed through cowhides, vacuum-dried for the super flat look and finished to a luxurious soft handle, this leather will, over time, age to a beautiful, rich patina

Applications:

Residential, Contract & Marine

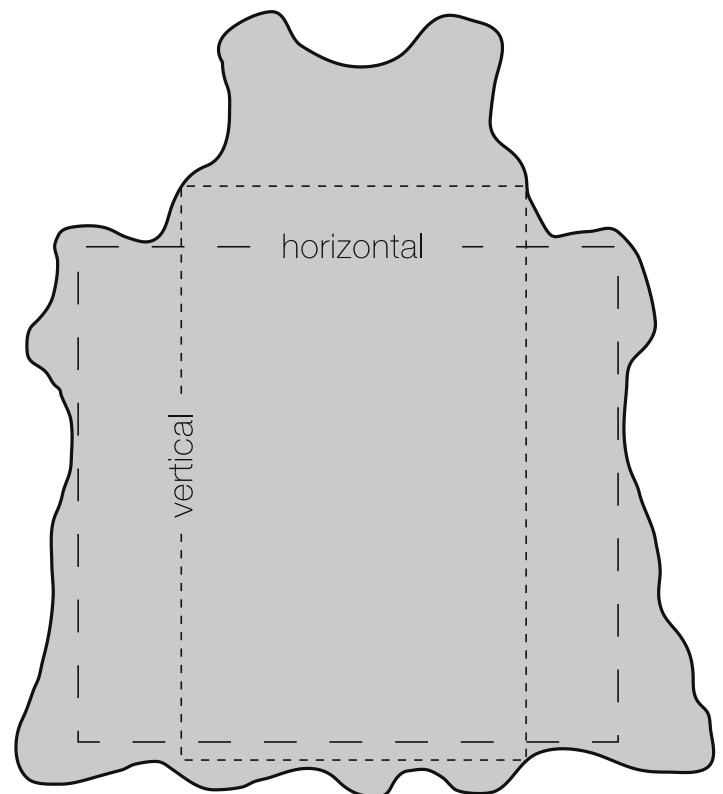

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.