



TECHNICAL SPECIFICATIONS

ARTICLE PUEBLO

Article's description:

- Thickness: 0.9 / 1.0 mm
- Average hide size: 50 – 55 sqft
- Chrome tanned, dyed through bovine leather.
- Finished with anilines and wax.
- Matt vintage look, light pull up effect.
- Applications: Domestic, Contract and Marine.

FASTNESS TESTS

- Light fastness: 2/3 Blue Scale.
- Rubbing fastness 50 cycles dry: 3 Grey Scale.
- Rubbing fastness 20 cycles wet: min 3 Grey Scale.
- Rubbing fastness 20 cycles perspiration: min 2 Grey Scale.
- Flexing endurance: no finish damage cracks after 50000 cycles.
- Tear strength: min 20 N/mm.
- pH: > 3.5 (if the pH value is below 4, difference figure pH < 0.7)
- Flammability: Cigarette and Match: Pass; IMO and Crib 5: On Request.

This leather is produced with raw materials and processes that ensure respect for the environment and safeguarding of the health of its workers and the end user.

Average Panel Sizes In Hides

Pueblo

50 sq.ft hide

Vertical panel 100cm x 200cm


Horizontal panel 150cm x 160cm

Product Description:

Naturally aged semi-aniline pull up leather,
finished with dyes and shiny waxes

Applications:

Residential, Marine & Contract

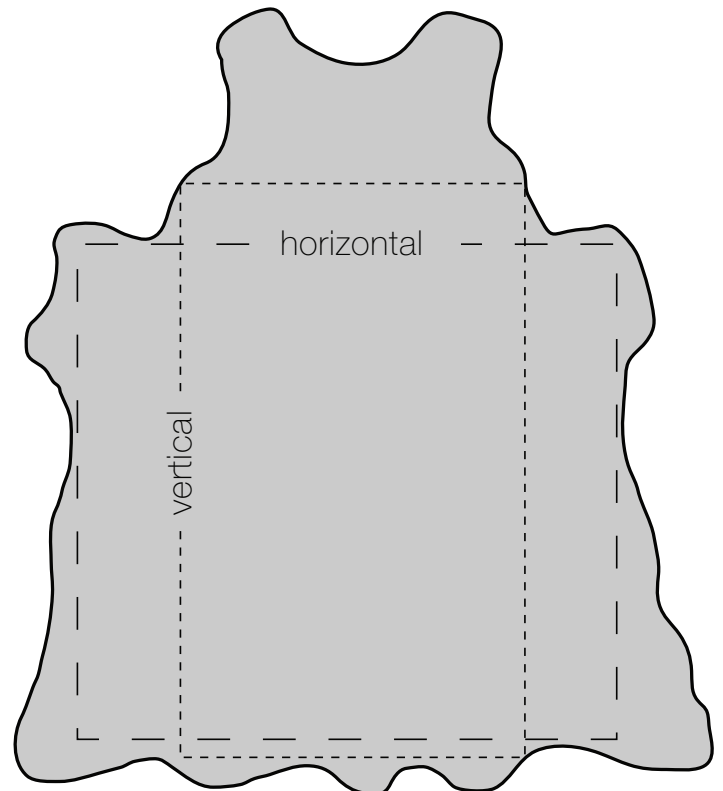

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.