



TECHNICAL SPECIFICATIONS

ARTICLE SYRACUSE

Article's description:

- Thickness: 1.2 / 1.4 mm
- Average hide size : 50-55 sqft
- Pigmented leather, natural grain.
- Applications: Domestic, High Contract and Marine.

FASTNESS TESTS

- Light fastness: > 5 Blue scale
- Rubbing fastness 500 cycles dry : > 4 Grey scale
- Rubbing fastness 250 cycles wet : > 3-4 Grey scale
- Rubbing fastness 80 cycles perspiration : > 3-4 Grey scale
- Finish adhesion : > 2 N/cm
- Flexing endurance: No finish damage cracks after 50000 cycles.
- Tear strength: min 20 N/mm
- pH: > 3.2 (if the pH value is below 4, difference figure pH < 0.7)
- Flammability: Cigarette and Match: Pass; IMO or Crib 5: On Request.

All the leathers comply with the strict regulations and EU Directives covering the use and presence of PCP; CFC; Chromo (VI) and Azo dyestuffs during the tanning process.

Average Panel Sizes In Hides

Syracuse

50 sq.ft hide

Vertical panel 100cm x 200cm


Horizontal panel 150cm x 160cm

Product Description:

Pigmented leather with a grain pattern

Applications:

Residential, Contract * Marine

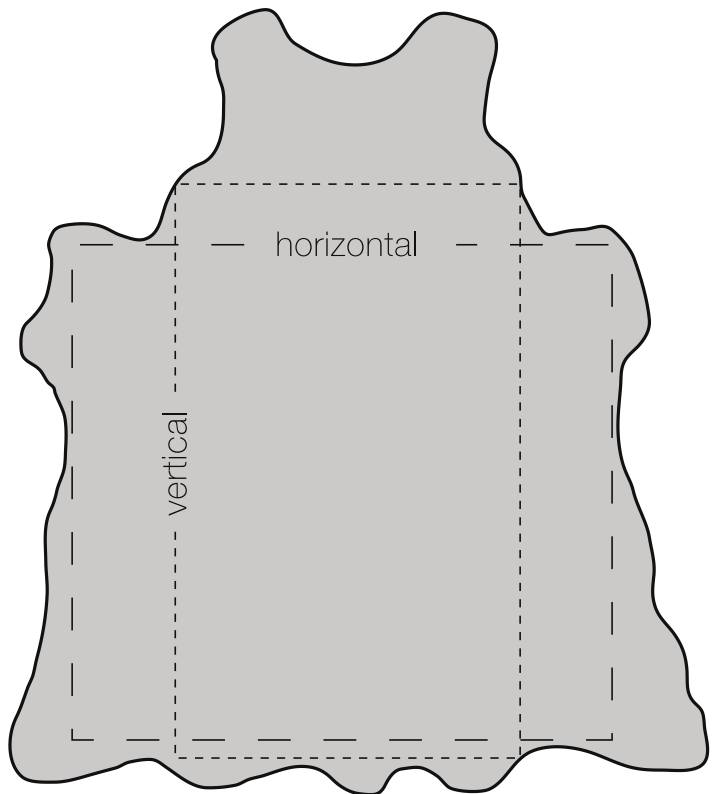

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.