



TECHNICAL SPECIFICATIONS

ARTICLE TUROA

Article's description:

- Thickness: 1.0- 1.1 mm
- Average hide size: 45 sqft
- Vacuum dried, pearlized leather.
- Applications: Residential, Contract and Marine.

FASTNESS TESTS

- Light fastness: > 5 Blue scale
- Rubbing fastness 500 cycles dry: > 4 Grey scale
- Rubbing fastness 150 cycles wet: > 4 Grey scale
- Rubbing fastness 80 cycles perspiration: > 4 Grey scale
- Finish adhesion: > 3.5 N/cm
- Flexing endurance: no finish damage cracks after 30000 cycles
- Tear strength: min 20 N/mm
- Flammability: Cigarette and Match: Pass; IMO and Crib 5: On Request.

This leather complies with the strict regulations and EU Directives covering the use and presence of PCP, CFC, Chromo VI, Dimethyl fumarate (DMF) and Azo dyestuffs during the tanning process.

Due to the natural properties of leather colour variations between one dye lot and another may occur.

Average Panel Sizes In Hides

Turoa

45 sq.ft hide

Vertical panel 110cm x 170cm


Horizontal panel 130cm x 150cm

Product Description:

Pearlised, smooth, vacuum dried leather

Applications:

Residential, Marine & Contract

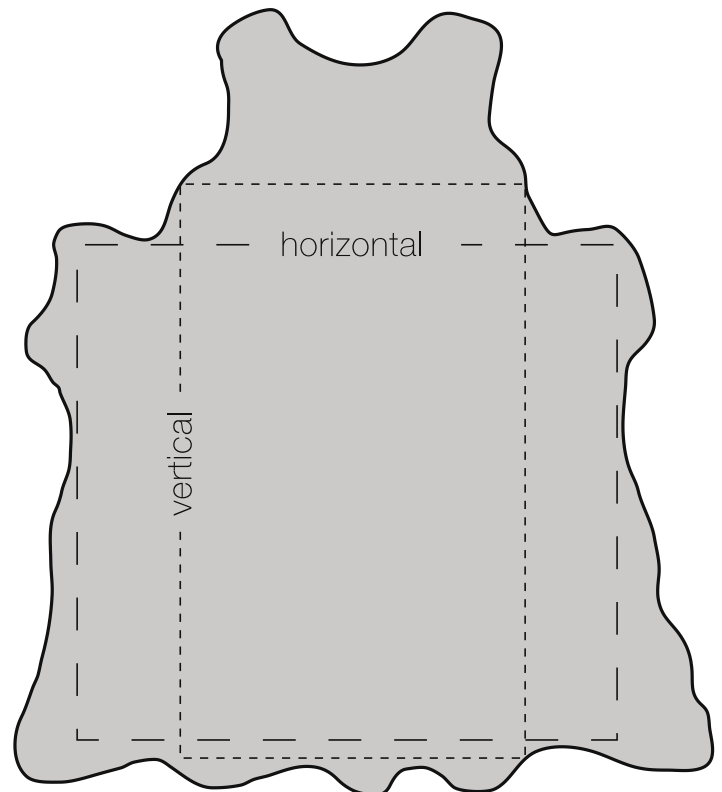

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.