

TECHNICAL SPECIFICATIONS

ARTICLE PALM SPRINGS

Article's description:

- Thickness: 1.1/1.2 mm
- Average hide size: 50-55 sqft
- European bovine leather , Chrome tanned , Aniline dyed , finished with pigments and resins , suitable for outdoor use
- Applications: Domestic, Contract and Marine , Outdoor

FASTNESS TESTS

- Light fastness: >7 Blue Scale (after 15 days xenon test)
- Rubbing fastness 1000 cycles dry : > 4 Grey Scale
- Rubbing fastness 350 cycles wet : > 4 Grey) Scale
- Rubbing fastness 500 cycles perspiration (pH 8) : > 4 Grey Scale
- Rubbing fastness 800 cycles perspiration (pH 5.5) : > 4 Grey Scale
- Adhesion of finishing : > 2 N/cm
- Resistance to Sea Water after 8 hours storage : > 4/5
- Flexing endurance: no finish damage cracks after 10,000 cycles
- Tear strength: > 20 N/mm
- Flammability:
 - BS 5852: 1979 , source 0-1 (Cigarette and Match) : Pass
 - UNI EN ISO 1021 : 1 / 2 2006 : Pass
 - CAL TB-117 (2013, sec.1) : Pass
 - IMO FTPC Part 7 & Part 8 : Pass
 - BS 5852 : source 5 (Crib 5) : ON REQUEST

In accordance with the European regulation: No harmful products Mentioned in European legislation are used to produce this article.

Palm Springs Average Panel Sizes In Hides


50 sq.ft hide

Vertical panel 100cm x 200cm

Horizontal panel 150cm x 160cm

Applications:

Residential, Contract, Marine, Outdoor

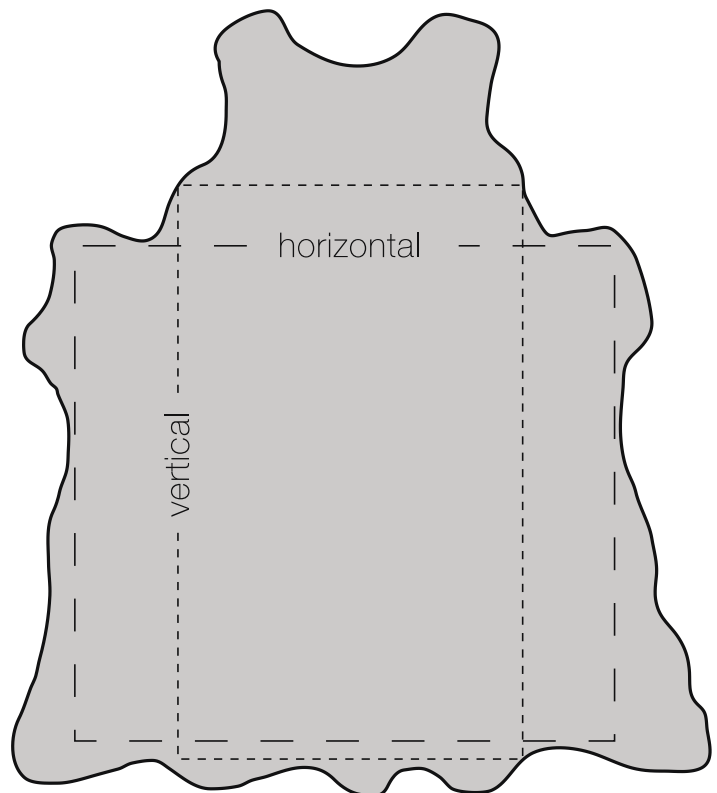

Please note that these are average panel size; depending on the shape of the hide there can be differences. This should be used as a guideline only.