

#### **TECHNICAL SPECIFICATIONS**

### **ARTICLE TANGIERS**

### Article's description:

• Thickness: 1.0 / 1.2 mm

• Average hide size : 45 / 50 sqft

• Ox / Bull, European origin.

Chrome tanning.

Semi aniline leather with a protective wax-coat.

• Applications: Suitable for domestic and contract \*\* scratches easily.

#### **FASTNESS TESTS**

• Light fastness: > 3 Blue Scale

• Rubbing fastness 100 cycles dry : > 4 Grey Scale

• Rubbing fastness 20 cycles wet : > 4 Grey Scale

• Rubbing fastness 20 cycles perspiration: 4 Grey Scale

• Flexing endurance: no finish damage cracks after 30000 cycles

• Tearing resistance: > 20 N/mm

• Adhesion: > 3.5 N/cm

• Flammability: Cigarette and Match: Pass; California TB 117: Pass; Crib 5: On Request.

All the leathers comply with the strict regulations and EU Directives covering the use and presence of PCP; CFC; Chromo (VI) and Azo dyestuffs during the tanning process.



# Average Panel Sizes In Hides

# **Tangiers**

## 50 sq.ft hide


Vertical panel 100cm x 200cm Horizontal panel 150cm x 160cm

### **Product Description:**

Full grain semi aniline leather with a silky touch

# Application:

Residential, Contract & Marine

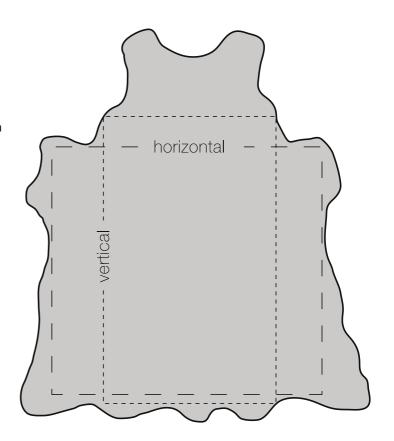

Please note that these are average panel sizes; depending on the shape of the hide there can be differences. This should be used as a guideline only.